

The background image shows a street scene with several orange traffic cones placed on the pavement. In the background, there is a large brick building with multiple arched doorways. Several people are walking on the sidewalk in front of the building. To the right, there are yellow taxis and a bus. The text is overlaid on the image in a large, bold, black font.

**「即固E-120」
快速修補戰備水泥砂漿
公車道鋼性路面破損修補**

「即固E-120」 快速修補戰備水泥砂漿


- 特殊水硬性「硫鋁酸鈣水泥」。
- 具快硬性，快速達到強度後即可恢復使用。
 - 1小時達 3,000 psi結構強度。
 - 3小時達5,000 psi後即可恢復通行。
 - 28 天抗壓強度達>9,000psi。
- 可承受高載重壓力。

「即固E-120」 快速修補戰備水泥砂漿

- 高強度、不乾縮、不龜裂。
- 不需底劑，混凝土面噴水濕潤即可。
- 修補厚度6~8公分。
- 結著性極佳。
- 防水性。
- 可抗硫酸鹽等的侵蝕，而具耐久性。
- 具抗凍融性。



修補公車道破損的鋼性路面

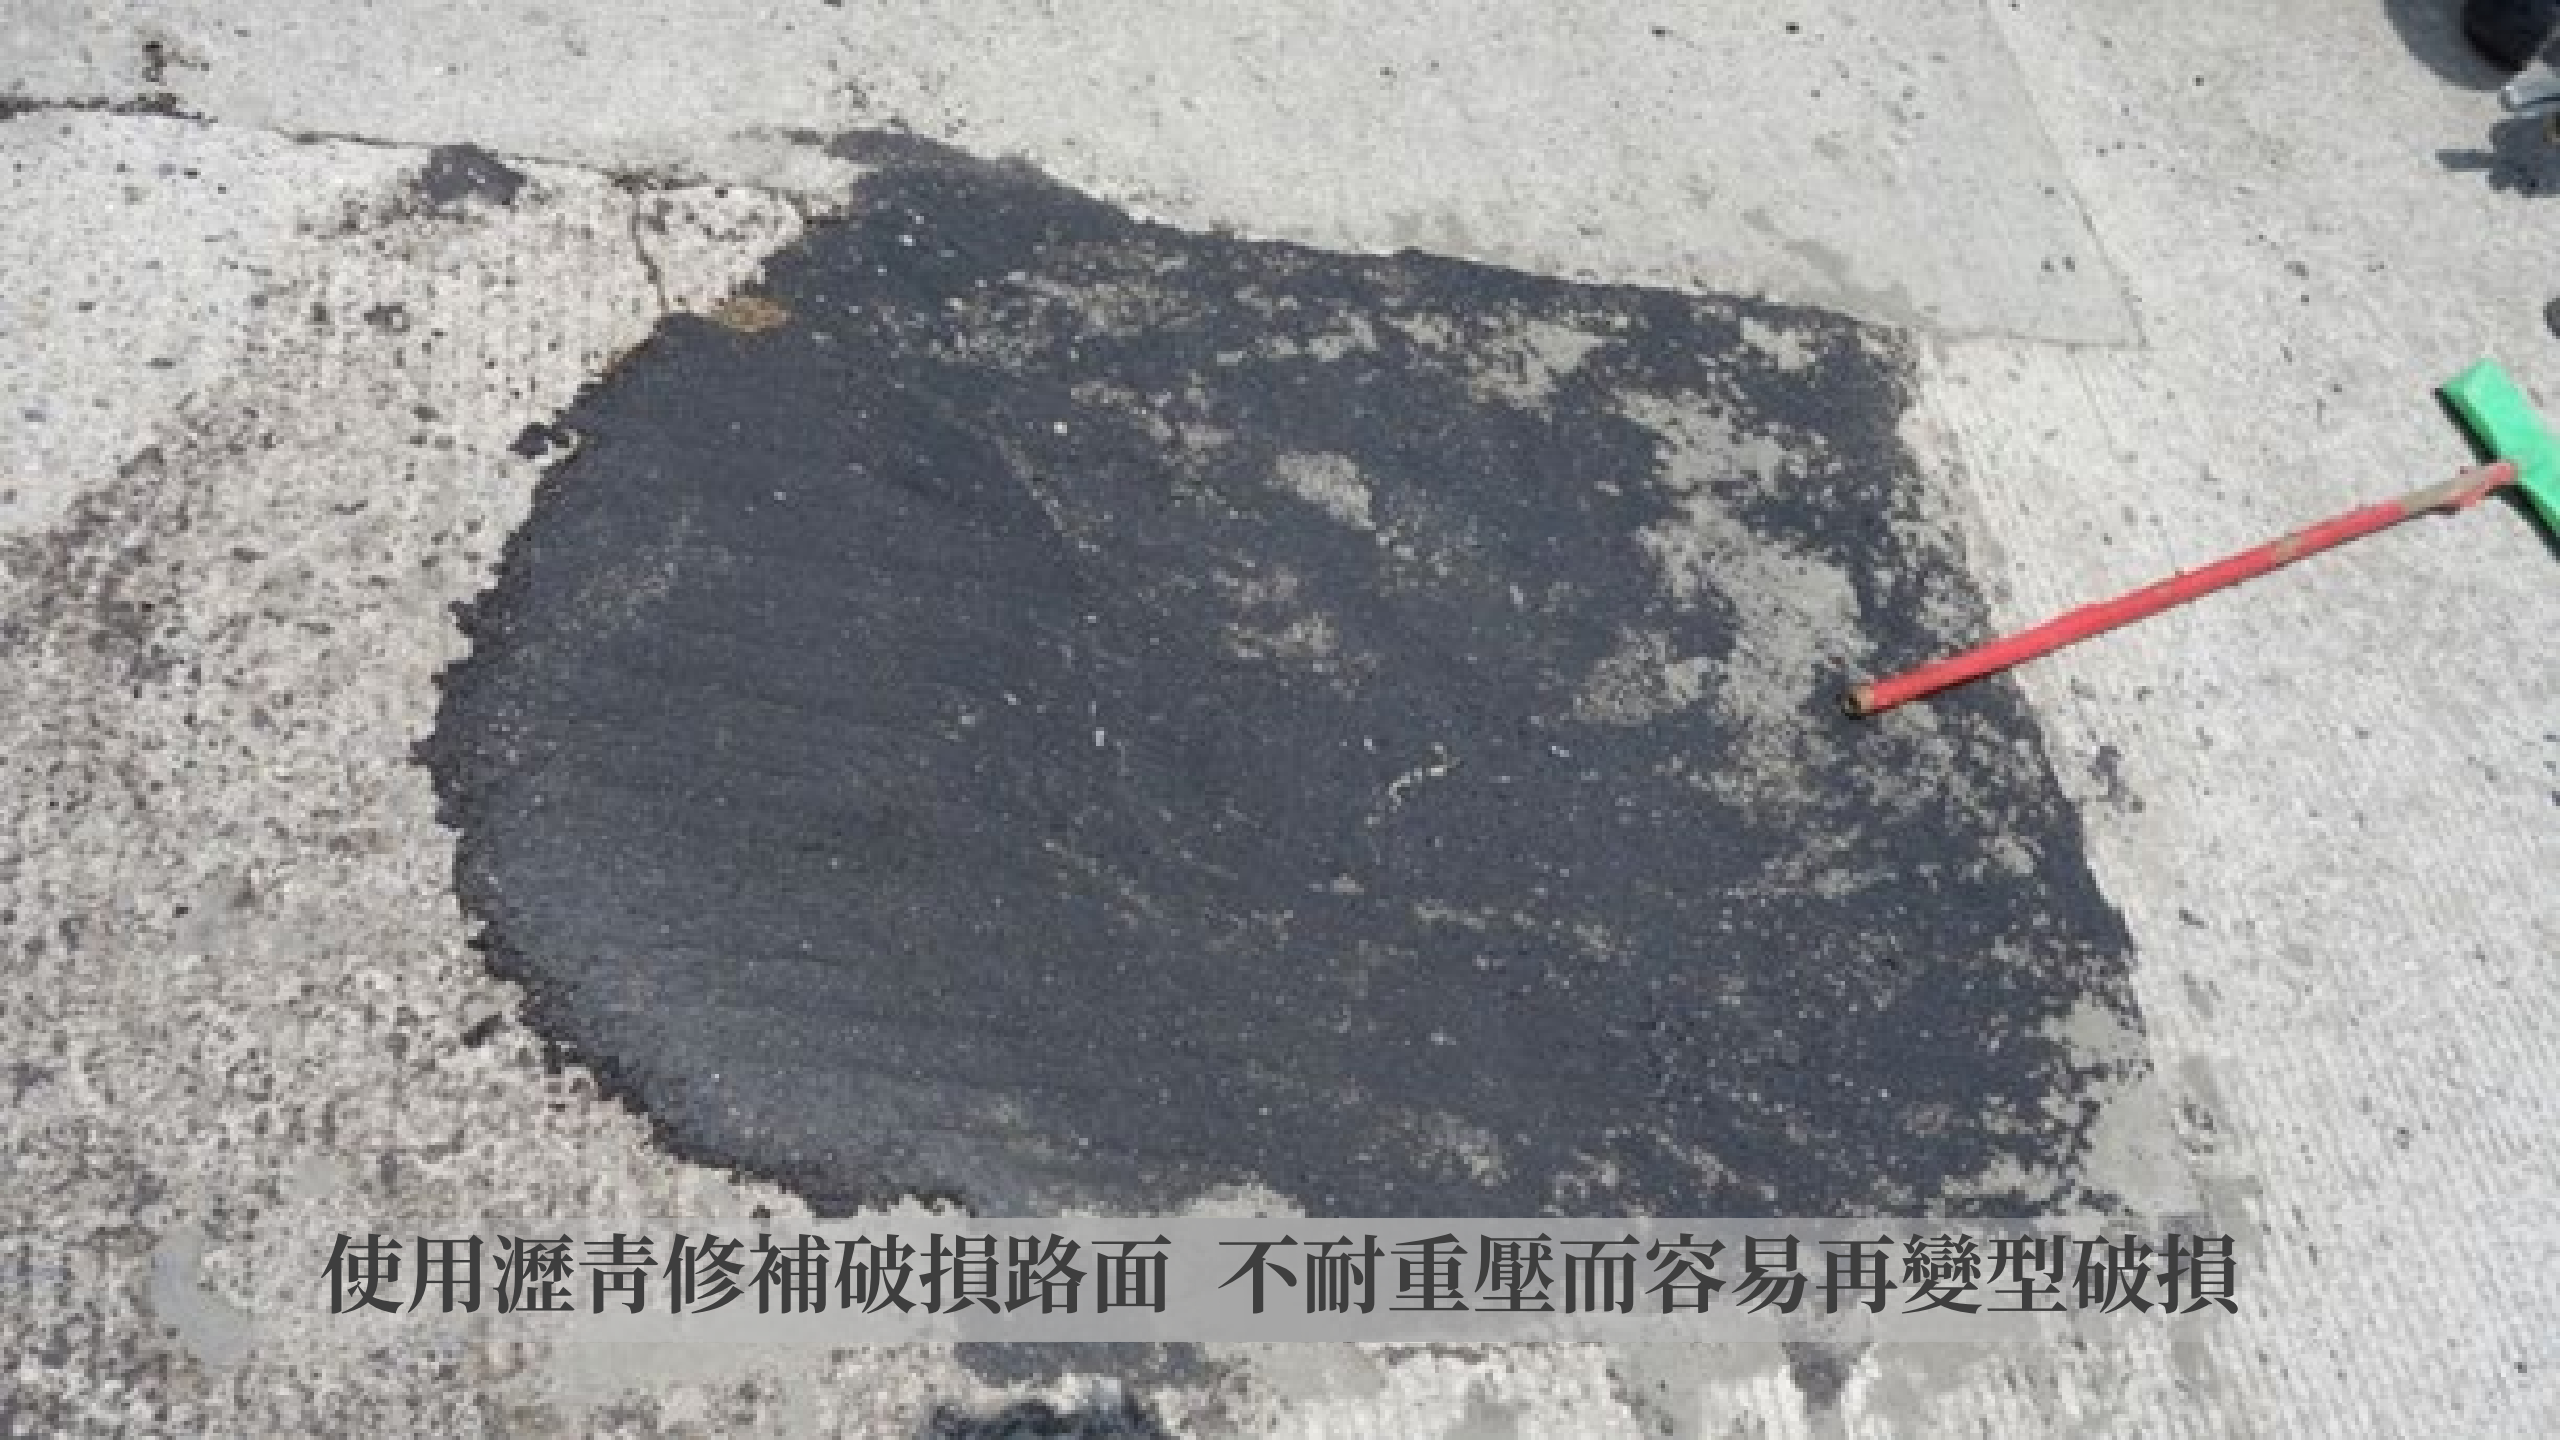

使用瀝青修補破損路面 不耐重壓而容易再變型破損



破損處切割敲除 碎屑清除乾淨並用水濕潤



底部鋪設1/2厚含粗骨材的「即固E-120」水泥砂漿



鋪上鋼筋



表層以1/2厚含粗骨材的「即固E-120」水泥砂漿補平



修飾面鋪設「即固E-120」純水泥砂漿



修飾面使用鏟刀鏟平



將鏟平的修飾面掃粗止滑

A rectangular patch of newly laid concrete is shown on a paved surface. The patch is a light tan color and has a smooth, slightly textured appearance. To the right of the patch, a broom with a green head and a red handle lies on the ground. A gloved hand is visible near the broom handle. In the background, several large white bags are stacked. The overall scene suggests a road repair or construction project.

路面修補完成後用水養護2小時

The background image shows a street scene with several orange traffic cones placed on the road. In the background, there is a brick building with arched doorways and a yellow sign with the number '22'. Pedestrians are walking on the sidewalk, and yellow taxis are visible on the right side of the road.

敬請指教!!
統偉貿易股份有限公司
T: (02)2721-8069